



LIVE TO PLAY LIVE®

FUZZFACE®
JDF2

Dunlop
JIMDUNLOP.COM

92500864050 REV D

JDF2 FUZZ FACE® DISTORTION

DESCRIPTION


- The classic fuzz box used by legendary rockers of the '60s and '70s
- Built to the exact specs of the original Dallas-Arbiter Fuzz Face
- Warm germanium tones

DIRECTIONS

- Run a cable from your guitar to the Fuzz Face's Input jack and another cable from the Fuzz Face's Output jack to your amplifier.
- Start with both controls at 12 o'clock.
- Turn the effect on by depressing the footswitch.
- Rotate the VOLUME knob clockwise to increase overall effect volume or counterclockwise to decrease it.
- Rotate the FUZZ knob clockwise to increase amount of fuzz or counterclockwise to decrease it.

CONTROLS

- 1 VOLUME knob controls overall effect volume
- 2 FUZZ knob controls amount of fuzz
- 3 FOOTSWITCH toggles on/bypass

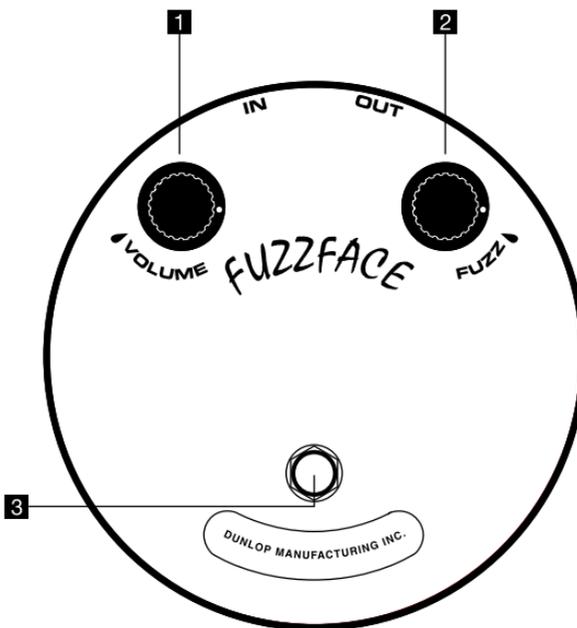

SPECIFICATIONS

Input Impedance	10 k Ω
Output Impedance	
Max Volume	2 k Ω
Mid Volume	115 k Ω
Max Gain	45 dB
Bypass	True Hardwire
Current Draw	500 μ A
Power Supply	9 volts DC

POWER

The JDF2 Fuzz Face is powered by one 9 volt battery (remove bottom plate to install).



DUNLOP MANUFACTURING, INC.
P.O. BOX 846 BENICIA, CA 94510 U.S.A.
TEL: 1-707-745-2722 FAX: 1-707-745-2658